


SOA-1060-90-YY-30dB

High-gain Semiconductor Optical Amplifier

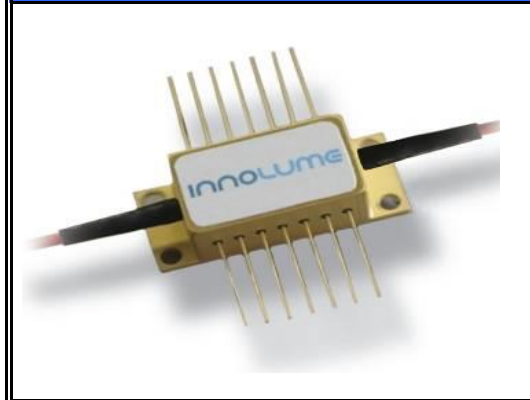

Features:

- Broadband high gain (>30dB in 1010-1090nm range)
- Strong linear polarization
- RoHS compliance

Applications:

- Swept-source, tunable lasers
- Booster optical amplifiers
- Optical preamplifiers
- Optical coherence tomography (OCT)

SPECIFICATIONS

Test conditions: CW operation, chip temperature 25°C, the case is mounted on room temperature heatsink

Parameters	Min.	Typ.	Max.	Unit
Operating current (Iop)		400	500	mA
Forward voltage @ Iop		1.5	1.7	V
Gain				
Small signal gain ¹ ²	30	33		dB
Gain mean wavelength ¹	1045	1060	1075	nm
Gain bandwidth ¹ @ -3dB	70	90		nm
Gain saturation output power ² @ -3dB	15	18		dBm
Noise figure ³ ***		5		dB
Amplified Spontaneous Emission (ASE)*				
ASE optical power ex fiber from each port	5	7		mW
ASE mean wavelength	1035	1050	1065	nm
ASE bandwidth @ -3dB	70	90		nm
ASE** spectrum ripples ³ (RMS in 1nm range, 10pm resolution)		0.02	0.2	dB
ASE polarization extinction ratio (PER) at each port	15	19		dB

¹ at -25dBm input optical power
² at wavelength of gain maximum
³ at wavelength of ASE maximum

* without input light
 ** from output port
 *** $NF=10\log_{10}(2P_{ASE}/G_{hv})$ [D.Baney et al., Optical Fiber Techn. 6, 122 (2000)]

TYPICAL SOA PARAMETERS vs. OPERATING CURRENT

Test conditions: CW operation, input signal -25dBm, chip temperature 25°C, case temperature 25°C

Operating Current, mA	Gain, dB	Gain bandwidth @ -3dB, nm	Saturation output power @ -3dB, dBm	Ripples RMS, dB
200	29	50	15	0.01
400	33	90	19	0.02
600	34	80	20	0.03


ABSOLUTE MAXIMUM RATINGS

Parameters	Min.	Max.	Unit
SOA reverse voltage	-	2	V
SOA CW forward current	-	800	mA
Input optical power	-	20	dBm
Thermo Electric Cooler current	-	3	A
Thermo Electric Cooler voltage	-	4	V
Fiber bend radius	3	-	cm
Chip operating temperature range	10	40	°C
Case operating temperature range	0	70	°C
Storage temperature range	-40	85	°C


TYPICAL PERFORMANCE for reference only

Test conditions: CW operation, chip temperature 25°C, the case is mounted on room temperature heatsink


Gain spectra at different currents

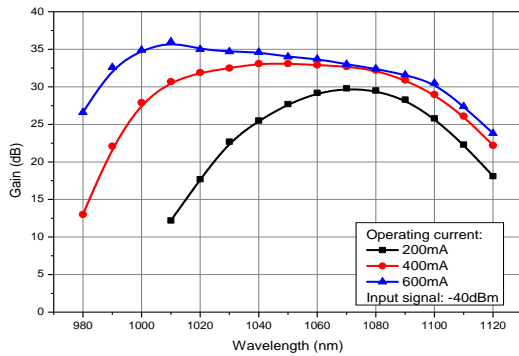


Gain and Output power vs. input signal

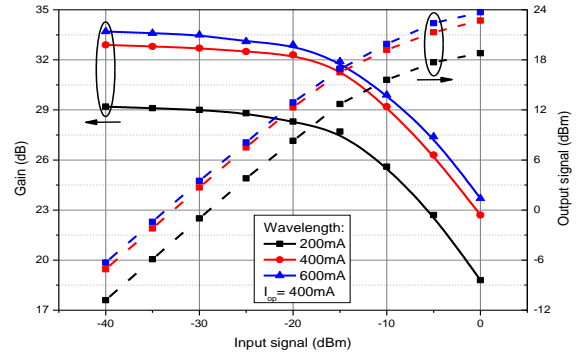


Gain spectra at different input signals

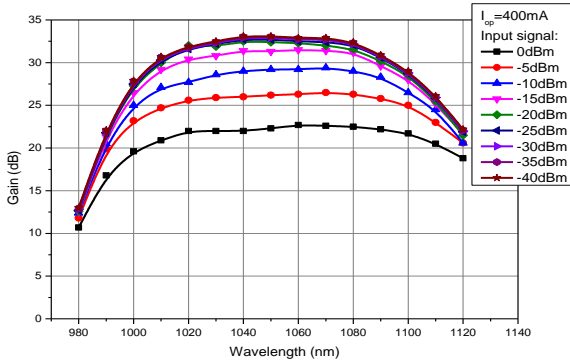


Spectra of amplified optical signal

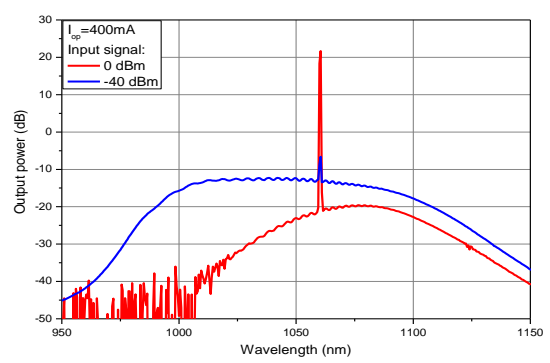


Absorption spectrum¹

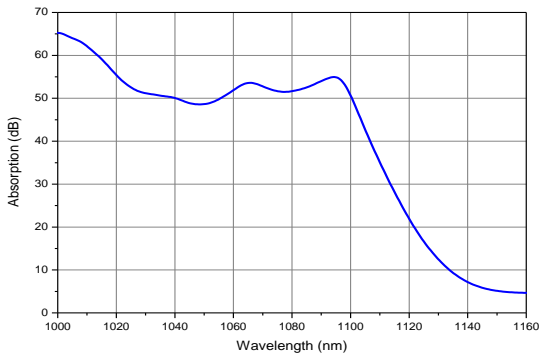


Absorption² vs. input signal

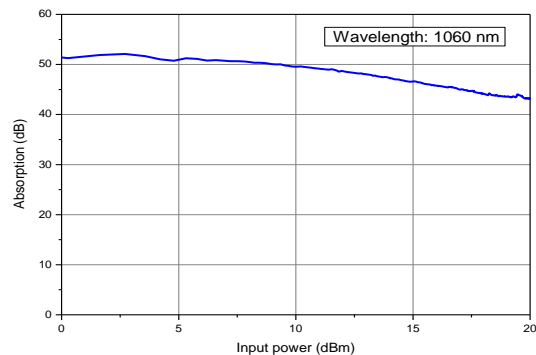

Output power at different input signals

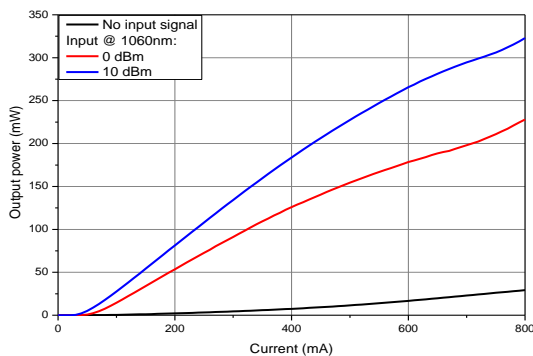

ASE Spectra (no input signal)

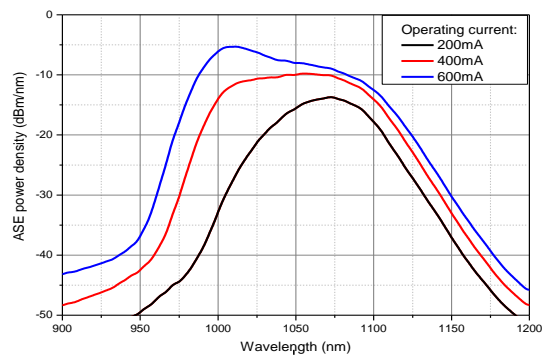

¹ Absorption of linearly polarized 100uW broadband SLD radiation (SOA is short-circuited). Measured after polarizer at SOA output port.

² Absorption of linearly polarized single-frequency laser radiation (SOA is short-circuited). Measured after polarizer at SOA output port.

Part Number Identification

YY: Optical fiber type (PM – PM980 fiber; HI – HI1060 fiber)
 Example: SOA-1060-90-PM-30dB

THERMISTOR SPECIFICATION			FIBER SPECIFICATION			
Parameters	Value	Unit	Parameters	HI1060	PM980	Unit
Thermistor type	NTC	-	Numerical aperture (Typical)	0.14	0.12	
Resistance @25°C	10 ± 0.1	kOhm	Cutoff wavelength	920±50	900±70	nm
Beta 0-50°C	3375±1%	K	Mode-field diameter @1060nm	6.2±0.3	6.6±0.3	µm
			Cladding diameter	125±1	125±1	µm
			Coating diameter	245±15	245±15	µm
			Length (each port)	1.0 ± 0.1	1.0 ± 0.1	m
			Connector	FC/APC (narrow key)		

DIMENSIONS (in mm)	
	<p>Pin identification:</p> <ul style="list-style-type: none"> 1 TEC "+" 2 Thermistor 3 - 4 - 5 Thermistor 6 - 7 - 8 - 9 - 10 SOA anode "+" 11 SOA cathode "-" 12 - 13 Case 14 TEC "-"

SAFETY AND OPERATING INSTRUCTIONS

The light emitted from this device is invisible and can be harmful to the human eye. Avoid looking directly into the fiber connector when the device is in operation. Proper laser safety eyewear must be worn during operation with open connector.

Absolute Maximum Ratings may be applied to the SOA for short period of time only. Exposure to maximum ratings for extended period of time or exposure to more than one maximum rating may cause damage or affect the reliability of the device. Operating the SOA outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum forward current cannot be exceeded.

A proper heatsink for the SOA on thermal radiator is required. The SOA must be mounted on radiator with 4 screws (bolt down in X-style fashion with initial torque set to 0.075Nm and final X-style bolt down at 0.15Nm) or with clamps. The deviation from flatness of radiator surface must be less than 0.05mm. It's recommended using of Indium foil or thermal conductive and soft material between bottom of the case and heatsink for thermal interface. It's undesirable to use thermal grease for this.

Do not pull the fiber. Do not bend a fiber with a radius smaller than 3 cm. Operate the SOA with clean fiber connector only. Periodically check and clean the connector if necessary. To clean the connector use a clean-room compatible tissue only, put some Isopropyl alcohol onto it and carefully clean the facet of the connector, or use special fiber cleaning tools. Perform cleaning only with the SOA current switched off.

Electrostatic discharge can lead to device failure. Take necessary precautions to prevent ESD.

NOTE: Innolume product specifications are subject to change without notice