

# Femtolute F/G/H Family


Erbium-doped Femtosecond Fiber Lasers



HX-150 Laser Head

## Product Features

- HX-150 model offers **adjustable power at dual wavelengths**
- Compact and robust design for easy integration
- Simple on/off operation by control panel or RS-232 interface
- Mechanical reliability complies with relevant MIL-STD-810F and IEC 60601-1 requirements
- Regulatory certifications available

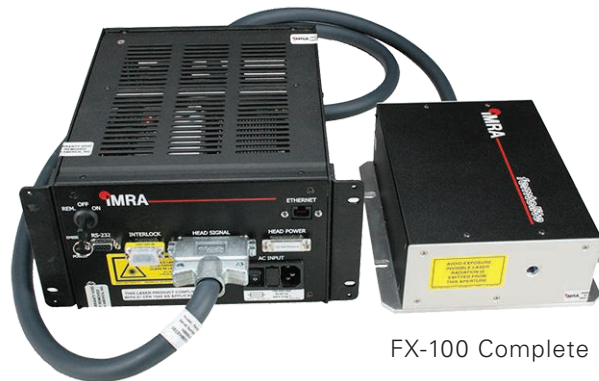

FX-100 Complete System

## Product Models

	FX-100	FX-150	GX-200	HX-150	
Center Wavelength	805 ± 15 nm	810 ± 15 nm	1620 ± 40 nm	810 ± 15 nm & 1620 ± 40 nm	
Average Power	≥ 100 mW	≥ 150 mW	≥ 200 mW	≥ 150 mW*	≥ 200 mW*
Pulse Duration	≤ 120 fs	≤ 140 fs	≤ 100 fs	≤ 140 fs	≤ 100 fs
Repetition Rate	75 ± 10 MHz				

\* At maximum setting


# Femtolite **F/G/H** Specifications

	<b>FX-100</b> 805 nm	<b>FX-150</b> 810 nm	<b>HX-150</b> 810 nm & 1620 nm*	<b>GX-200</b> 1620 nm
Polarization	Vertical with respect to baseplate			Horizontal*
Power Stability	≤ 1% rms after stabilization at 25 °C			
Laser Head Dimensions	230 x 193 x 76 mm <sup>3</sup>			
Output Aperture Height	43 mm			
Laser Head Weight	2 kg		3 kg	2 kg
Head Heat Dissipation	< 50 W			
Controller Dimensions	267 x 267 x 133 mm <sup>3</sup>			
Controller Weight	3.5 kg			
Operating Voltage	100-240 VAC at 50-60 Hz			
Power Consumption	< 250 W			
Operating Temperature	20-30 °C			
Storage Temperature	0-50 °C			
Warm-up Time	≤ 15 minutes			
Cable Length	2 m			


\*For HX-150 at maximum setting only



FX-100, FX-150 Warning Label

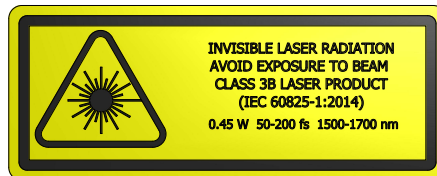

GX-200 Warning Label

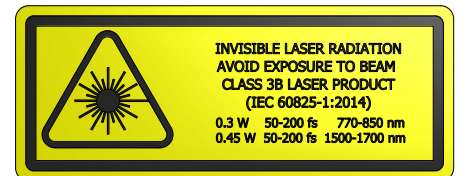

HX-150 Warning Label



**IMRA America, Inc.**

1044 Woodridge Ave., Ann Arbor, MI 48105 Phone: 734.930.2560 Fax: 734.930.9957

[lasers@imra.com](mailto:lasers@imra.com) [www.imra.com](http://www.imra.com)

Specification and features may change without notice