




Diode Laser Stack in Housing

qcw, tap water cooled

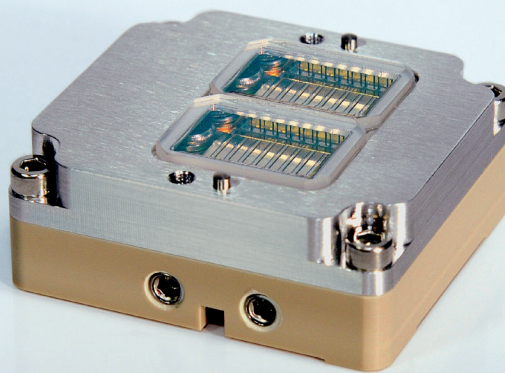

JOLD-x-QA-2x8A

Design 040221-031-24

Features:

- High optical output power up to 1.6 kW
- Small and robust design, light weight
- Sealed housing
- Cooling with tap water

Applications:

- Pumping of solid-state lasers
- Medical applications

Diode Laser Stack in Housing

qcw, tap water cooled

Specifications (Start of Life)

Product JOLD-x-QA-2x8A, Design 040221-031-24


Operation Mode	qcw			
Maximum Pulse Length / Duty Cycle	50 ms / 15 %	100 ms / 20 %	200 ms / 33 %	400 ms / 55 %
Maximum Pulse Power	1600	1100	560	300 W
Maximum Mean Power	234	220	184	165 W
Maximum Pulse Energy	78	110	112	120 J
Center Wavelength at 25 °C	808	808	808	808 nm
Center Wavelength Variation at 25 °C	10	10	10	10 nm
Typical Operation Current	110	85	55	42 A
Maximum Operation Current	120	90	60	45 A
Typical Threshold Current	15	15	15	15 A
Maximum Threshold Current	20	20	20	20 A
Typical Slope	16.6	15.8	14.0	11.2 W/A
Minimum Slope	14.8	14.6	12.4	10.0 W/A
Maximum Operating Voltage	30	30	30	30 V
Typical Fast Axis Divergence 95 %	66	66	66	66 °
Typical Slow Axis Divergence 95 %	10	10	10	10 °
Spot Size (at exit window)	15 mm x 26 mm			
Anode, Cathode Connectors	Via two M3 x 8 screws (ISO 4762)			
Weight				g
Operation Conditions	Non-condensing atmosphere; no cleanroom needed			
Expected Lifetime	15	15	7	4 Mshots

Cooling:

Flow Rate	1.6 l/min ± 10 %		
Water Temperature	15 ... 25 °C		
Maximum Inlet Pressure	400 kPa		
Maximum Pressure Drop	100 kPa		
Water Connection	Via o-ring gaskets 6 mm x 1 mm, EPDM, 70 shore		
Water Quality	Industrial grade, anti-freeze possible, particle filter < 100 µm (not included)		
Cooling System	Do not use any material that in combination with copper would form galvanic elements (e.g. aluminum, zinc, brass)		

See General User Information!

Options on request: variation number of bars, fast axis collimation

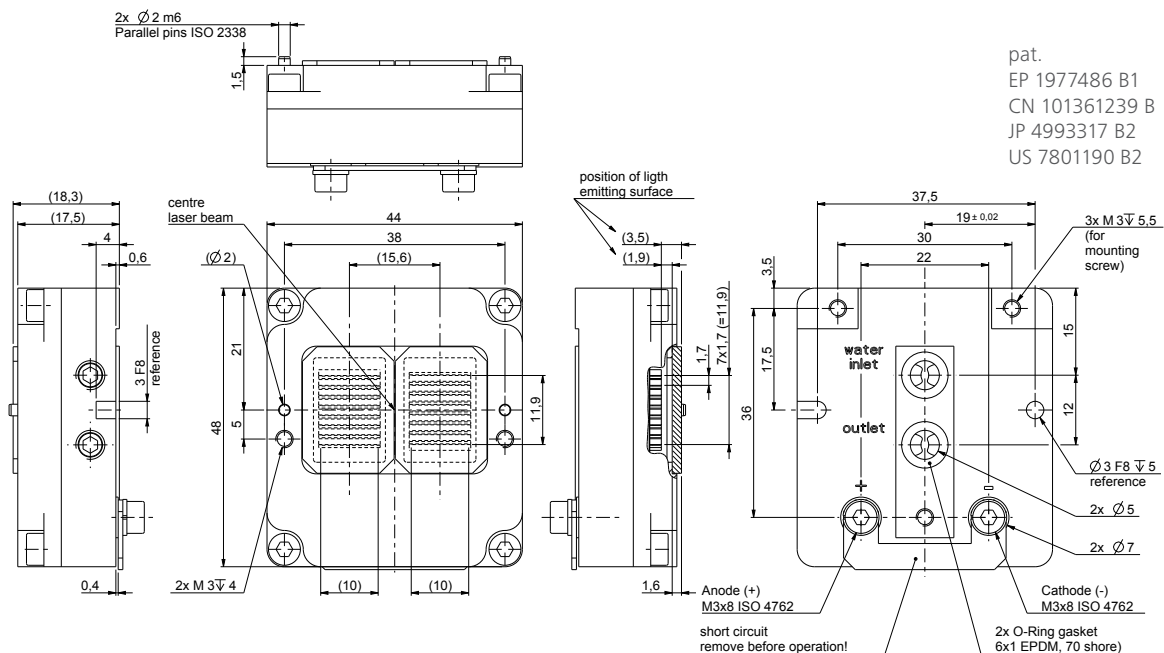

JENOPTIK | Healthcare & Industry
 JENOPTIK Laser GmbH
 Goeschwitzer Strasse 29 | 07745 Jena | Germany
 Phone: +49 3641 65-3053 | Fax: +49 3641 65-4011
 E-mail: laser.sales@jenoptik.com | www.jenoptik.com