

IRflex Series Nonlinear Longwave Mid-Infrared Fibers



IRflex is the only U.S. company totally dedicated to the development and production of innovative fibers and fiber-optic devices for mid – infrared applications from 2 to 10 μm .

A suite of patents relating to chalcogenide glass based fiber optics has been licensed to IRflex from the U.S. Naval Research Laboratory. These patents, in conjunction with IRflex's experienced team, enable IRflex to find cutting-edge solutions to non-linear mid-infrared applications.

Chalcogenide glass is made from a mixture of the chalcogenide elements: sulfur, selenium and tellurium. It offers promising properties such as transmission in mid and far infrared regions of spectra, lower values of phonon energies, high refractive index and very large nonlinearities as compared to silica. Chalcogenide glass fibers are the ideal candidates for mid-infrared applications that require high power laser delivery, chemical sensing, thermal imaging and temperature monitoring.

IRflex's **IRflex Series** nonlinear longwave mid-infrared fiber, made from extra high purity chalcogenide glass As_2Se_3 , is specially designed, and manufactured to generate and/or guide mid-infrared wavelengths from 1.5 to 10 μm with high transmission efficiency and nonlinearities about 1000 times that of silica glass fiber.



"The Mid-IR Fibers and Devices Company"

BENEFITS

Low loss

Broad transmission range from 1.5 to 10 μm

High power handling strength


High mechanical flexibility

Reliability and reproducibility

APPLICATIONS

- Mid-IR laser beam delivery
- IR spectroscopy
- Chemical sensing
- Scientific and medical diagnostics IR-imaging system
- Nonlinear supercontinuum generation

Typical Spectral Attenuation

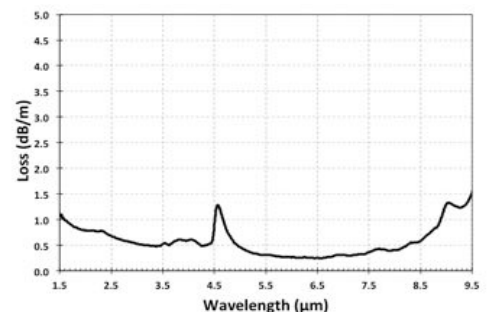

Technical Specifications

Transmission Range (μm)	1.5 – 10
Typical Optical Loss (dB/m)	<0.21@ 2.59 μm
Glass Composition	As ₂ Se ₃
Refractive Index	2.7
Numerical Aperture (NA)	0.27 – 0.33
Core Non-Circularity (%)	<1
Core/Clad Concentricity Error (μm)	<3
Tensile Proof Test (kpsi)	>15

IRF-Se Series Fiber Models	Core Diameter (μm)	Cladding Diameter (μm)	Operating Wavelength (μm)
IRF-Se-100 R&D	100	170	1.5 - 10
IRF-Se-100	100	170	1.5 - 8
IRF-Se-150	150	250	1.5 – 8.5
IRF-Se-300	300	370	1.5 – 9.7
IRF-Se-12	12	170	1.5 – 9.5

Standard fiber cables are terminated with stainless steel ferrules, FC/UPC, FC/APC or SMA905 connectors, stainless steel, PVDF or PVC jackets. Other different cable assembling configurations are offered upon request.

IRflex's FC/B® Connector: The FC connector at Brewster Angle enables perfect coupling without reflection with polarized laser beam, is also available upon request.



All statements and technical information related to the products herein are based upon information believed to be reliable or accurate. However, IRflex assumes no responsibility for any inaccuracies. The users assume all risks and liability whatsoever in connection with the use of a product or its application. IRflex reserves the right to change at any time without notice the design or specifications of its products described herein. (Version: 201601)

IRflex Corporation

300 Ringgold Industrial Parkway
 Danville, VA 24540, USA
 Tel: 434 483 4304
www.irflex.com