




## ORDER INFORMATION

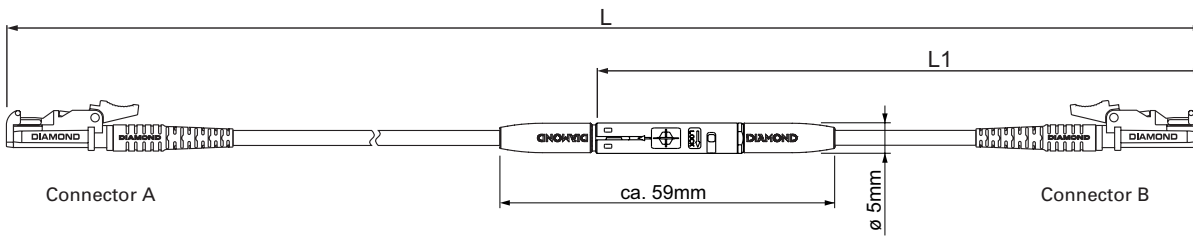

CONNECTOR A	CABLE	CONNECTOR B
Connector type*	Cable lengths	Connector type*
<input type="checkbox"/> E-2000™ <input type="checkbox"/> F-3000™ <input type="checkbox"/> FC <input type="checkbox"/> SC <input type="checkbox"/> ST™ <input type="checkbox"/> Without connector <input type="checkbox"/> _____	Length L (m): _____ Length L1 (m): _____  Note: - for an ideal OTO protection, the recommended length L1 is 0,25m.	<input type="checkbox"/> E-2000™ <input type="checkbox"/> F-3000™ <input type="checkbox"/> FC <input type="checkbox"/> SC <input type="checkbox"/> ST™ <input type="checkbox"/> Without connector <input type="checkbox"/> _____
	Cable type	
<input type="checkbox"/> 0° PC <input type="checkbox"/> 8° APC	<input type="checkbox"/> SM 9/125/245/900/2900 - G.652.D <input type="checkbox"/> SM 9/125/245/900/2700 - G.657.B3 <input type="checkbox"/> Customer cables**	<input type="checkbox"/> 0° PC <input type="checkbox"/> 8° APC
Notes: _____ _____		
<b>Delivery condition:</b> (see drawings below)	<input type="checkbox"/> Connected <input type="checkbox"/> Disconnected	

\* Connector colors according to DIAMOND standard configuration. Other colors are available upon request.

\*\* Customer cables can be used only after DIAMOND validations.

## Form of delivery

DiaLink-Saver connected

