


Filter: P5P18

Color: Olive Green
Material: Polycarbonate
VLT: 47%



Optical Density (OD):

- OD 10+ @ 185 - 315 nm
- OD 8+ @ 315 - 466 nm
- OD 7+ @ 466 - 470 nm
- OD 4+ @ 780 - 800 nm
- OD 6+ @ 800 - 847 nm
- OD 8+ @ 847 - 1080 nm
- OD 6+ @ 1080 - 1100 nm
- OD 4+ @ 1100 - 1115 nm
- OD 5+ @ 5250 - 14000 nm
- OD 8+ @ 10600 nm

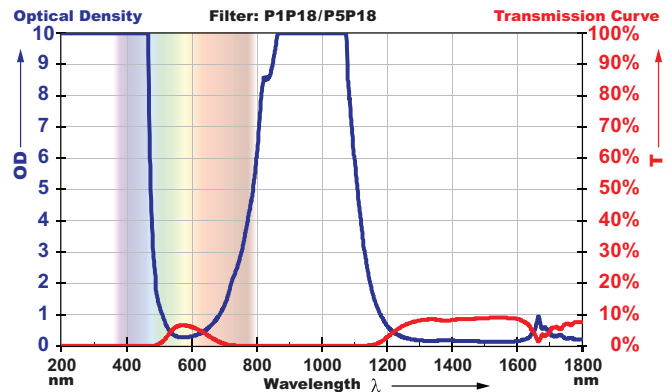

Available Frames

F18.P5P18.5000



F22.P5P18.5000



F42.P5P18.5000



Labels

F18.P5P18.5000

- OD 10+ @ 185 - 315 nm
- OD 8+ @ 315 - 466 nm
- OD 7+ @ 466 - 470 nm
- OD 4+ @ 780 - 800 nm
- OD 6+ @ 800 - 847 nm
- OD 8+ @ 847 - 1080 nm
- OD 6+ @ 1080 - 1100 nm
- OD 4+ @ 1100 - 1115 nm
- OD 5+ @ 5250 - 14000 nm
- OD 8+ @ 10600 nm



LASERVISION USA | 1-800-393-5565 | lasersafety.com

F22.P5P18.5000

- OD 10+ @ 185 - 315 nm
- OD 8+ @ 315 - 466 nm
- OD 7+ @ 466 - 470 nm
- OD 4+ @ 780 - 800 nm
- OD 6+ @ 800 - 847 nm
- OD 8+ @ 847 - 1080 nm
- OD 6+ @ 1080 - 1100 nm
- OD 4+ @ 1100 - 1115 nm
- OD 5+ @ 5250 - 14000 nm
- OD 8+ @ 10600 nm



LASERVISION USA | 1-800-393-5565 | lasersafety.com

F42.P5P18.5000


- OD 10+ @ 185 - 315 nm
- OD 8+ @ 315 - 466 nm
- OD 7+ @ 466 - 470 nm
- OD 4+ @ 780 - 800 nm
- OD 6+ @ 800 - 847 nm
- OD 8+ @ 847 - 1080 nm
- OD 6+ @ 1080 - 1100 nm
- OD 4+ @ 1100 - 1115 nm
- OD 5+ @ 5250 - 14000 nm
- OD 8+ @ 10600 nm



LASERVISION USA | 1-800-393-5565 | lasersafety.com

Markings *Illustration, may vary slightly from final product.*

F18/F22/F42

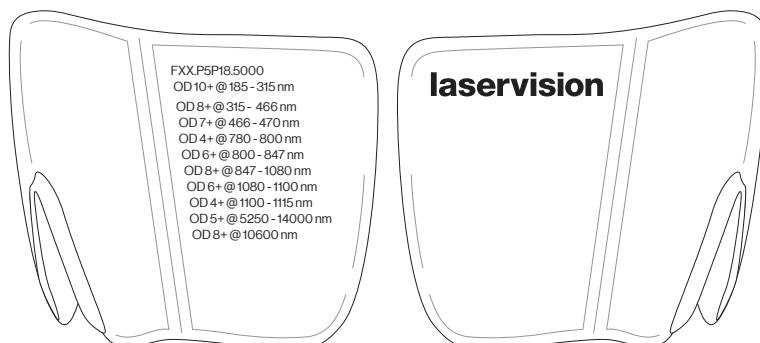

Authorized Laservision Signature

Date