

### NANOxtreme®

## Ruggedized Small Form Factor Optical Connector

NANOxtreme® is a miniature optical connector qualified for military and aeronautics applications where high levels of performance, compact dimensions, and low weight are critical.

It does not require any adaptor. It establishes a secure point-to-point optical connection as short as **22.6 mm in length** and as small as **6.5 mm in diameter**, for a very low weight of **3.55 g**.

The NANOxtreme® connector has been qualified for operation under shocks and vibration conditions. It has also been qualified under dynamic variations of the temperature from -55 °C to +125 °C. Besides, it has zero-outgassing as it is made of stainless-steel and Zirconia materials. Hence it is resistant to high-temperature and corrosion, and it is fully adapted to vacuum applications.

The NANOxtreme® connector is offered with a 1.25 mm ceramic (Zirconia) ferrule with either a PC or APC end-face polishing. It accepts single-mode and multimode fibers with a 125 µm cladding.

NANOxtreme® can be mounted with any type of fiber protections smaller than 1 mm in diameter including hytrel, peek and metal tubing.

Please contact us to discuss your specific requirements.



### KEY FEATURES

- Small form factor
- Very low weight
- Ruggedized
- Versatile
- Zero outgassing materials
- Resistant to corrosion and high-temperatures
- PC or APC polish
- PM, SM or MM fibers up to 125 µm cladding

### APPLICATIONS

- Military
- Aeronautics

### QUALITY

- ISO 9001:2015

### SEDI-ATI

8 rue Jean Mermoz  
ZA Saint-Guénault  
91080 Courcouronnes  
France  
[sedi-ati.com](http://sedi-ati.com)


**STANDARD PRODUCT SPECIFICATIONS**

Parameters	NANOxtreme®	
Ferrule end-face	PC (convex polishing)	APC (8° angle polishing)
Insertion loss	< 0.5 dB max., 0.15 dB typ.	< 0.7 dB max., 0.3 dB typ.
Return loss	<-45 dB typ.	<-65 dB typ.
Ferrule	Ø1.25 mm ceramic (Zirconia)	
Fiber type	PM, SM GI50/125, GI62.5/125 LCH50/125, LCH105/125	
Nut	5.5 mm stainless steel hexagon nut	
Spring	stainless steel	
Connector body	stainless steel	
Torque	0.75 Nm	
Durability	> 500 cycles	
Operating temperature range	-55°C to +125°C	
Storage temperature range	-55°C to +170°C connector alone; otherwise depending on the fiber type	

Test configuration consisted of a complete junction between two NANOxtreme connectors.

**MECHANICAL SCHEMES**

NANOxtreme® connector

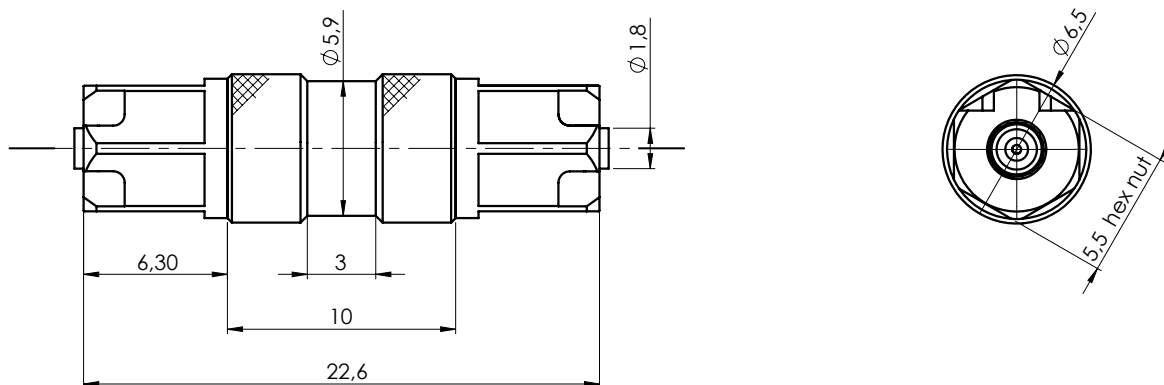

Order now

contact@sedi-ati.com

+33 1 69 36 64 32

**sedi-ati.com**